


ONLY ONE DIGITAL TEMP SENSOR OFFERS $\pm 0.5^{\circ}\text{C}$ ACCURACY AND 1.7V TO 3.5V OPERATION

The DS620 is ideal for low-power, battery-operated applications that require precise thermal regulation in a low-voltage environment. Supporting an industry-standard 2-wire interface, design-in is simple. With nonvolatile configuration and user-defined data storage, programming is easy. Typical applications include portable temperature loggers, portable medical equipment, networking equipment, servers and computers, test equipment, and any thermally sensitive system.



- ◆ Operates from 1.7V to 3.5V Supply
- ◆ Measures Temperature from -55°C to $+125^{\circ}\text{C}$
- ◆ $\pm 0.5^{\circ}\text{C}$ Accuracy from 0°C to $+70^{\circ}\text{C}$
- ◆ User-Selectable 10-, 11-, 12-, or 13-Bit Resolution
- ◆ 4 Bytes of EEPROM Memory for Thermostat Settings
- ◆ 4 Bytes of EEPROM Memory for General-Purpose Use
- ◆ Configurable as a Stand-Alone Thermostat
- ◆ 8-Pin μSOP

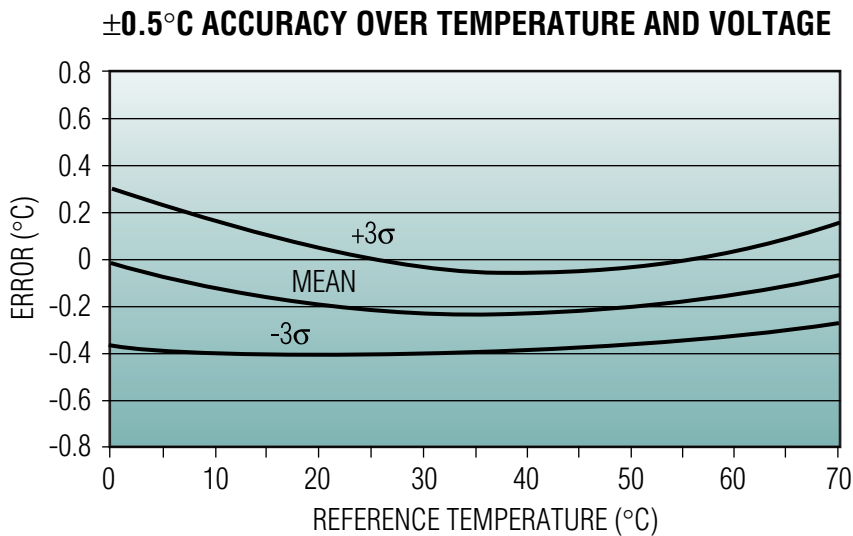

www.maxim-ic.com

FREE Temp Sensors Design Guide—Sent Within 24 Hours!

CALL TOLL-FREE 1-800-998-8800 (6:00 a.m.–6:00 p.m. PT)

For a Design Guide or Free Sample



Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

MAXIM is a registered trademark of Maxim Integrated Products, Inc. DALLAS is a registered trademark of Dallas Semiconductor Corp.

© 2004 Maxim Integrated Products, Inc. All rights reserved.