


# SMALLEST, HIGH-EFFICIENCY, HIGH-BRIGHTNESS LED DRIVERS SAVE SPACE AND COST

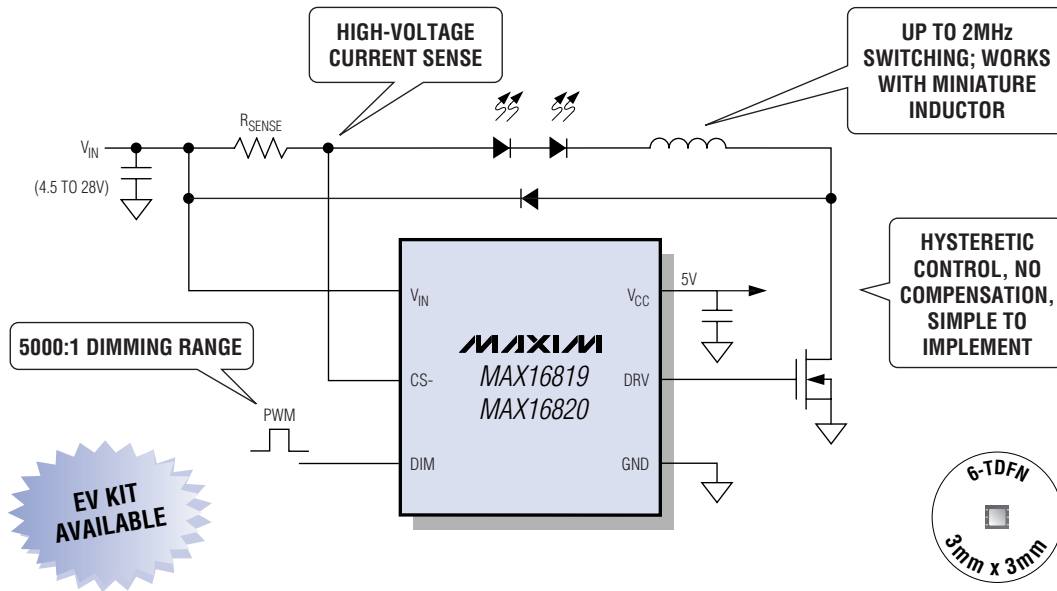

## Features:

- ◆ 4.5V to 28V Input-Voltage Range
- ◆  $\pm 5\%$  LED Current Accuracy
- ◆ 0.5A Source/1A Sink Gate Drive
- ◆ 5V Regulator with 10mA Capability
- ◆ Operates from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$

## Ideal for:

- ◆ Architectural and Industrial Lighting
- ◆ MR16 Bulbs
- ◆ Automotive Exterior and Interior Lighting
- ◆ Indicators and Emergency Lights

For Additional High-Brightness LED Drivers,  
Visit: [www.maxim-ic.com/HB-LED](http://www.maxim-ic.com/HB-LED)

# MAXIM

[www.maxim-ic.com](http://www.maxim-ic.com)

**FREE Automotive Design Guide—Sent Within 24 Hours!**

CALL TOLL FREE 1-800-998-8800 (7:00 a.m.–5:00 p.m. PT)

For a Design Guide or Free Sample

**MAXIM/DALLAS  
DIRECT!**  
DISTRIBUTION  
1-888-MAXIM-IC

**ARROW**  
ARROW ELECTRONICS, INC.  
1-800-777-2776

**AVNET**  
electronics marketing  
1-800-332-8638

Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

The Maxim logo is a registered trademark of Maxim Integrated Products, Inc. The Dallas Semiconductor logo is a registered trademark of Dallas Semiconductor Corp.  
© 2007 Maxim Integrated Products, Inc. All rights reserved.