



12-BIT, 2.3Gsp/s MULTI-NYQUIST DAC DELIVERS INDUSTRY'S BEST SFDR AT HIGH IF

Enables Wideband and Direct RF Communications at One-Third the Power


SUPERIOR SPURIOUS-FREE DYNAMIC RANGE AND SIGNAL BANDWIDTH AT HIGH IF

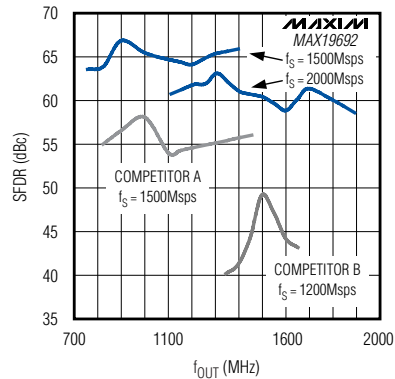


SUPERIOR UPDATE RATE AT A FRACTION OF THE POWER

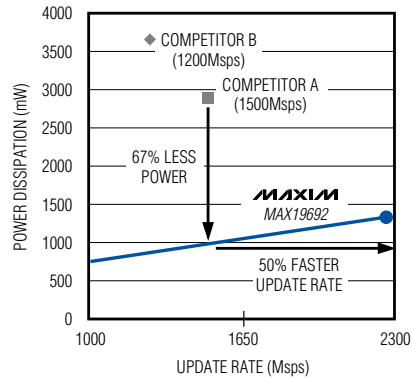

REPLACE THIS

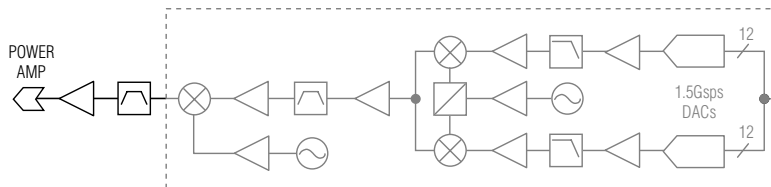

WITH THIS



- ◆ Industry's Highest Dynamic Performance
 - ◆ Noise Spectral Density = -162dBm/Hz at f_{OUT} = 200MHz
 - ◆ SFDR = 75dBc at f_{OUT} = 200MHz
 - ◆ SFDR = 73dBc at f_{OUT} = 600MHz
 - ◆ SFDR = 65dBc at f_{OUT} = 1300MHz
 - ◆ SFDR = 60dBc at f_{OUT} = 1800MHz

- ◆ 2.3Gsp/s Output Update Rate
 - ◆ Synthesizes 1GHz Signal Bandwidth
 - ◆ 4:1 Multiplexed LVDS Inputs
 - ◆ Low Power: 760mW at 1Gsp/s
 - ◆ Compact 11mm x 11mm, 169-CSBGA
 - ◆ Evaluation Kit Available



www.maxim-ic.com/Multi-Nyquist-DAC

FREE High-Speed ADCs, DACs, & AFEs Design Guide—Sent Within 24 Hours!

CALL TOLL FREE 1-800-998-8800 (7:00 a.m.–5:00 p.m. PT)

For a Design Guide or Free Sample



Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

The Maxim logo is a registered trademark of Maxim Integrated Products, Inc. The Dallas Semiconductor logo is a registered trademark of Dallas Semiconductor Corp. © 2006 Maxim Integrated Products, Inc. All rights reserved.