



DUAL-RF POWER DETECTOR DELIVERS SUPERIOR PERFORMANCE AND INTEGRATION

**OUTSTANDING
CHANNEL-TO-CHANNEL ISOLATION**



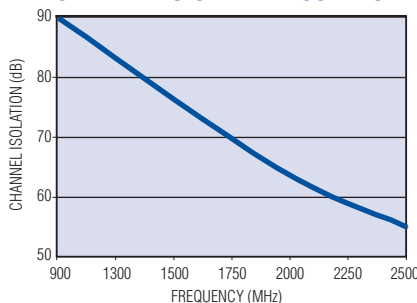


**SUPERIOR A-B
DYNAMIC RANGE**

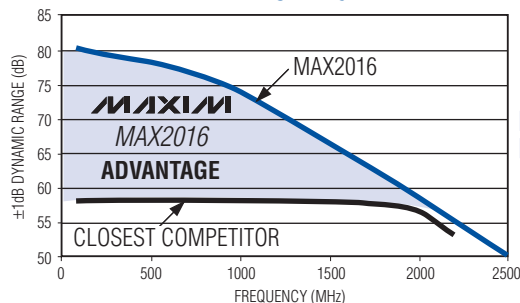

**WORLD'S MOST
PRECISE MONOLITHIC
SOLUTION FOR
VSWR/RL, GAIN,
AND POWER
MEASUREMENTS!**

- ◆ **Ideal for Many RF-Detection and Control Applications**
 - ◆ VSWR/RL Measurements and Load Integrity Detection
 - ◆ Gain Measurements and Control
 - ◆ Power Measurements and Control
- ◆ **Low-Frequency to 2.5GHz Operation**
- ◆ **Exceptional Precision over Temperature**
 - ◆ Dual Log Detectors Track over Temp
 - ◆ Outstanding Dynamic Range Maintained— Only a 5dB Degradation over -20°C to +85°C!
- ◆ **On-Chip Comparators and 2V Reference Enable Window Detection for VSWR and Power-Alarm States**

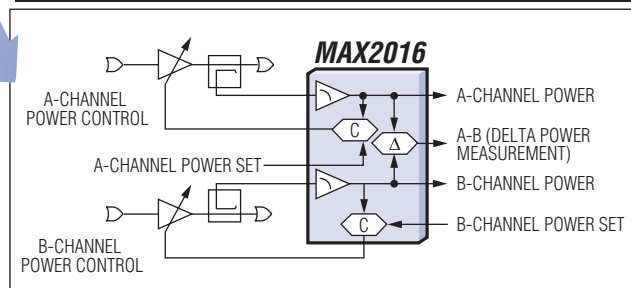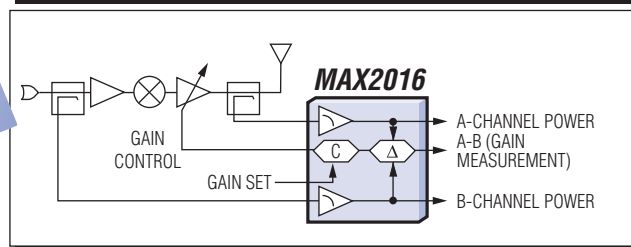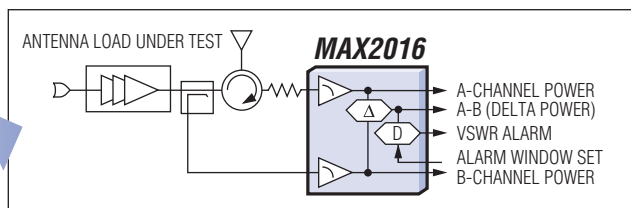

**Free Product
Slide Rule!**
Visit website for details.



www.maxim-ic.com/DualDetector

FREE Wireless Design Guide, and High-Speed ADCs, DACs, and AFEs Design Guide—Sent Within 24 Hours!

CALL TOLL-FREE 1-800-998-8800 (6:00 a.m.–6:00 p.m. PT)

For a Design Guide or Free Sample



Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

The Maxim logo is a registered trademark of Maxim Integrated Products, Inc. The Dallas Semiconductor logo is a registered trademark of Dallas Semiconductor.
© 2004 Maxim Integrated Products, Inc. All rights reserved.