


ULTRA-LOW-CAPACITANCE ESD PROTECTORS IN UCSP

Ideal for High-Speed Applications Such as USB, HDMI, and DVI

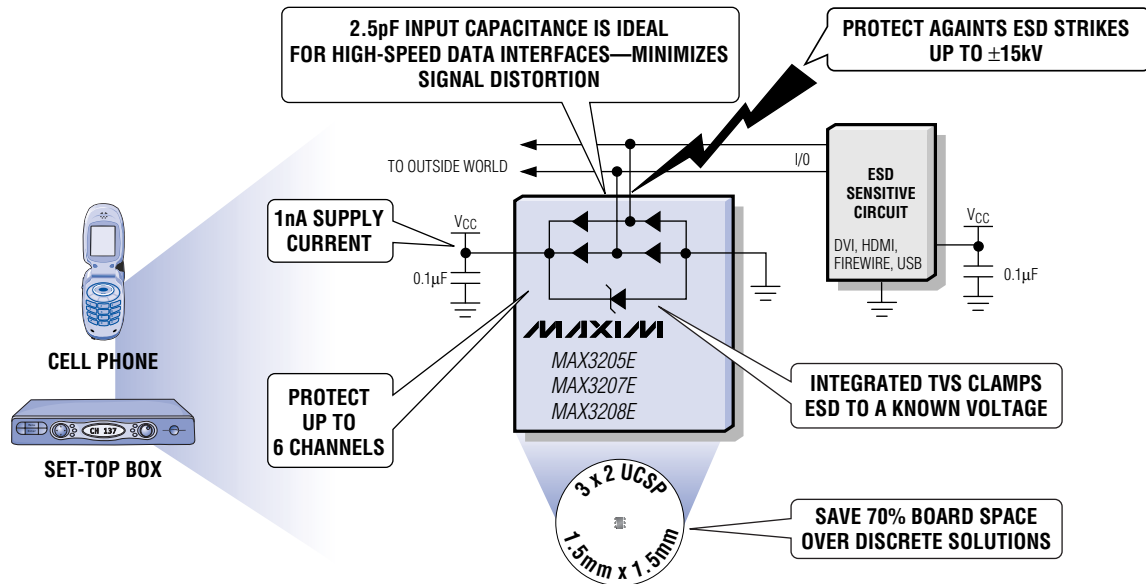

Select the Ideal ESD-Protection Device for Your Application

Part	Vcc Supply Voltage (V)	No. of ESD Protection Channels	Input Capacitance (pF)	ESD Protection: ±15kV Human Body Model ±8kV IEC 61000-4-2 Contact ±15kV IEC 61000-4-2 Air-Gap	Supply Current (nA)	Package
NEW MAX3207E	+0.9 to +5.5	2	2.5	✓	1	6-SOT
NEW MAX3205E	+0.9 to +5.5	6	2.5	✓	1	9-UCSP/16-TQFN
NEW MAX3208E	+0.9 to +5.5	4	2.6	✓	1	16-TQFN/ 10-µMAX®
MAX3202E	+0.9 to +5.5	2	5	✓	1	4-UCSP™/6-TQFN
MAX3203E	+0.9 to +5.5	3	5	✓	1	6-UCSP/TQFN
MAX3204E	+0.9 to +5.5	4	5	✓	1	6-UCSP/TQFN
MAX3206E	+0.9 to +5.5	6	5	✓	1	9-UCSP/12-TQFN

UCSP is a trademark and µMAX is a registered trademark of Maxim Integrated Products, Inc.



www.maxim-ic.com

FREE Interface Design Guide—Sent Within 24 Hours!

CALL TOLL-FREE 1-800-998-8800 (6:00 a.m.—6:00 p.m. PT)

For a Design Guide or Free Sample



Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

The Maxim logo is a registered trademark of Maxim Integrated Products, Inc. The Dallas Semiconductor logo is a registered trademark of Dallas Semiconductor.
© 2004 Maxim Integrated Products, Inc. All rights reserved.