


WORLD'S SMALLEST RS-232 TRANSCEIVERS SAVE UP TO 70% BOARD SPACE

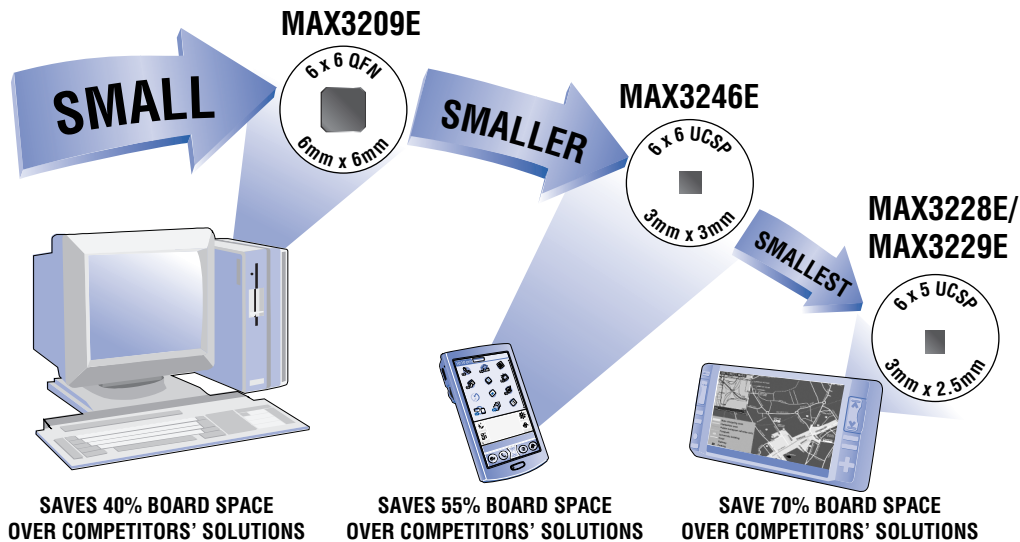

- ◆ 1µA Low-Power Shutdown Mode
- ◆ Fastest Data Rates—Up to 1Mbps
- ◆ V_L Provides Compatibility with Low-Voltage Logic—Down to +1.65V
- ◆ 2.4V Operation (MAX3228E/MAX3229E)
- ◆ Enhanced ESD Protection
 - ◆ ±15kV per Human Body Model
 - ◆ ±15kV per IEC 1000-4-2 Air Gap Discharge
 - ◆ ±8kV per IEC 1000-4-2 Contact Discharge

PART	NO. OF Tx/Rx	SUPPLY VOLTAGE (V)	SHUTDOWN SUPPLY CURRENT (µA)	DATA RATE (kbps)	RS-232 COMPLIANT	PACKAGE	PRICE† (\$)
MAX3209E	6/10	+3 to +5.5, +12	50	460	✓	6 x 6 QFN	2.54
MAX3228E	2/2	+2.35 to +5.5	1	250	✓	6 x 5 UCSP	2.25
MAX3229E	1/1	+2.35 to +5.5	1	250	✓	6 x 5 UCSP	2.07
MAX3241E/MAX3243E/MAX3244E	3/5	+3 to +5.5	1	250	✓	7 x 7 QFN	2.40
MAX3245E	3/5	+3 to +5.5	1	1000	✓	7 x 7 QFN	2.40
MAX3246E	3/5	+3 to +5.5	1	250	✓	6 x 6 UCSP	1.80

†1000-up recommended resale. Prices provided are for design guidance and are FOB USA. International prices will differ due to local duties, taxes, and exchange rates. Not all packages are offered in 1k increments, and some may require minimum order quantities.



www.maxim-ic.com

FREE Interface Design Guide—Sent Within 24 Hours!

CALL TOLL-FREE 1-800-998-8800 (6:00 a.m.—6:00 p.m. PT)

For a Design Guide or Free Sample



Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

MAXIM is a registered trademark of Maxim Integrated Products, Inc. © 2003 Maxim Integrated Products.