


# LOWEST NOISE TIA PROVIDES -38dBm SENSITIVITY AT 155Mbps

## Achieves 12nARMS Input Referred Noise and Meets APON Class C Specification

The MAX3657 is a transimpedance amplifier for optical receivers operating up to 155Mbps. Low noise, high gain, and low-power dissipation enable optical receiver designers to obtain APON Class C level performance. A photodiode filter provides positive bias for the photodiode. All this performance comes in a small die size for easy assembly into a TO-46 header with a photodiode. The MAX3656 is offered in both die form and a 3mm x 3mm QFN package. It is priced at \$1.72.†

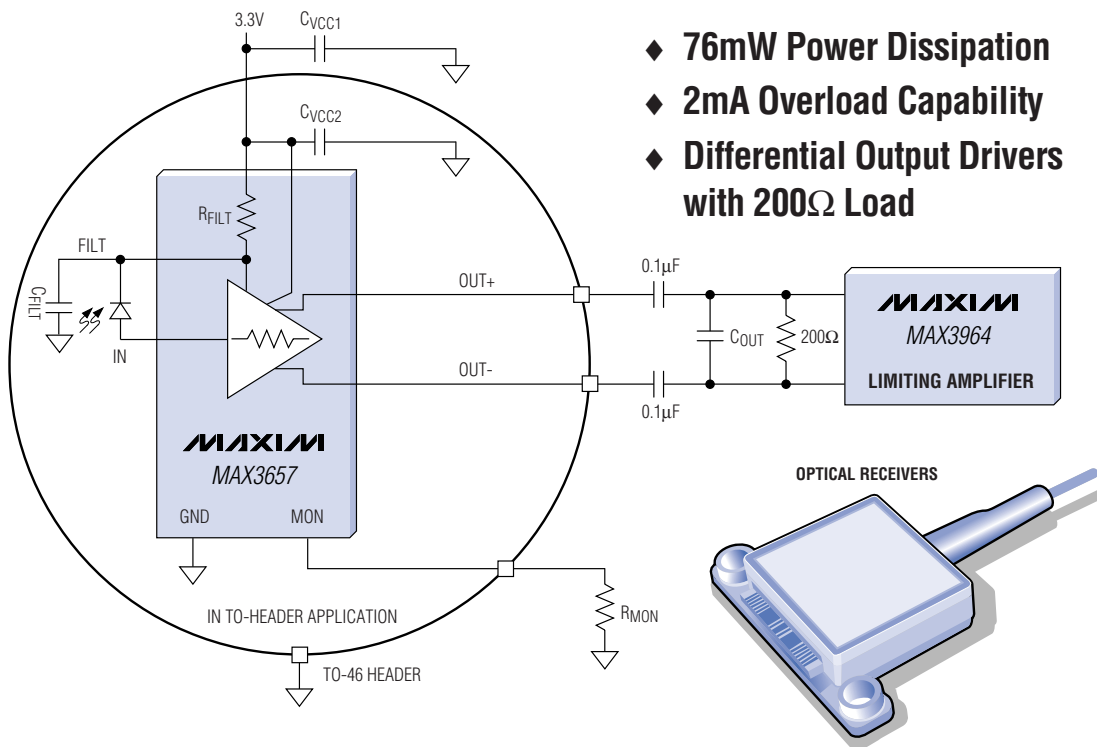

Product can be sold in die form.

†1000-up recommended resale. Prices provided are for design guidance and are FOB USA. International prices will differ due to local duties, taxes, and exchange rates. Not all packages are offered in 1k increments, and some may require minimum order quantities.

# MAXIM

[www.maxim-ic.com/fiber](http://www.maxim-ic.com/fiber)

**FREE Fiber Design Guide—Sent Within 24 Hours!**

CALL TOLL-FREE 1-800-998-8800 (6:00 a.m.—6:00 p.m. PT)

For a Design Guide or Free Sample

MAXIM/DALLAS  
**DIRECT!**  
DISTRIBUTION  
1-888-MAXIM-IC

ARROW  
ARROW ELECTRONICS, INC.  
1-800-777-2776

AVNET  
CILICON  
1-800-332-8638

Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

MAXIM is a registered trademark of Maxim Integrated Products, Inc. © 2003 Maxim Integrated Products.