


DUAL-SCART VIDEO SWITCH IS IDEAL FOR COST-SENSITIVE STB APPLICATIONS

Use the MAX7457 for Video Switching and Standard Analog Switches for Audio Switching to Reduce Cost

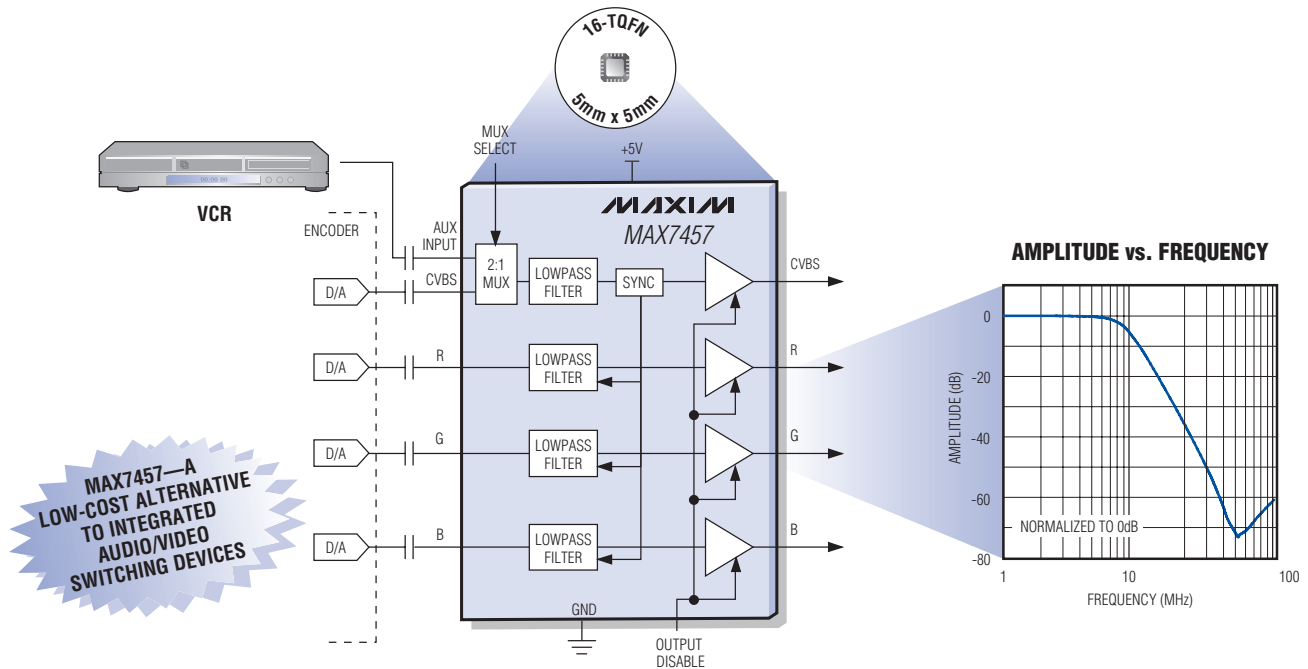

- ◆ Filter Characteristics Ideal for PAL Video Signals
- ◆ Stopband: -41dB at 27MHz
- ◆ Passband: ± 0.3 dB Flatness
- ◆ Aux Input for VCR Loop-Through
- ◆ +6dB Output Buffer Gain
- ◆ Output-Disable Mode
- ◆ Each Channel Drives Two 150 Ω Video Loads

Part	No. of Channels	Output Buffer Gain	Package	Price(\$) [†]
MAX7457	4	+6dB	16-TQFN	1.62

[†] 1000-up recommended resale. Prices provided are for design guidance and are FOB USA. International prices will differ due to local duties, taxes, and exchange rates. Not all packages are offered in 1k increments, and some may require minimum order quantities.



www.maxim-ic.com

FREE Video Design Guide—Sent Within 24 Hours!

CALL TOLL FREE 1-800-998-8800 (6:00 a.m.–6:00 p.m. PT)

For a Design Guide or Free Sample



Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

The Maxim logo is a registered trademark of Maxim Integrated Products, Inc. The Dallas Semiconductor logo is a registered trademark of Dallas Semiconductor Corp.

© 2005 Maxim Integrated Products, Inc. All rights reserved.