
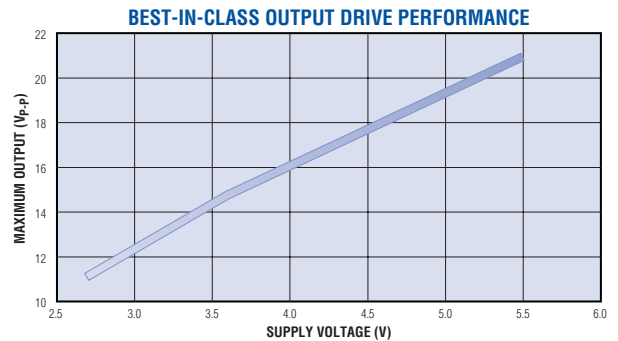


INDUSTRY'S BEST CERAMIC SPEAKER DRIVER FOR ULTRA-THIN MOBILE DEVICES

The MAX9788's Class G technology can deliver up to 20V_{P-P}, ideal for driving ultra-thin piezoelectric and ceramic speakers, for portable applications such as cell phones, smartphones, and portable media players.

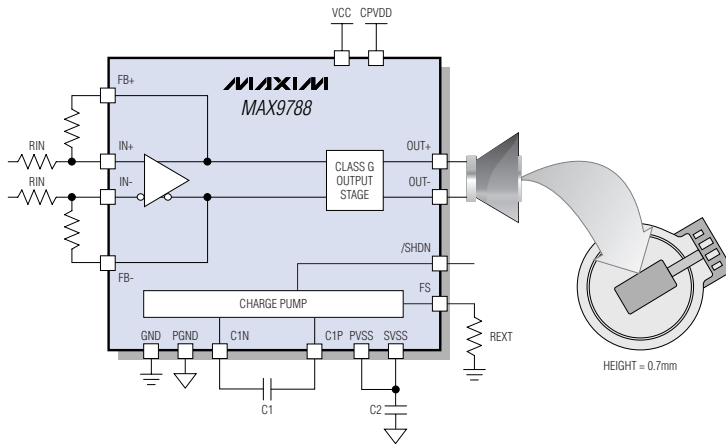

- ◆ 2.7V to 5.5V Single-Supply Operation
- ◆ Low-Power Mode in Shutdown (0.1µA Supply Current)
- ◆ Output Provides 16V_{P-P} from a Single Li+ Battery
- ◆ Differential Inputs Compatible to Audio Codec Output
- ◆ Clickless/Popless Operation Prevents Audible Transients
- ◆ Ceramic Or Piezoelectric Speakers Are 70% Thinner than Conventional Dynamic Speakers

Part	Description	Package (mm x mm x mm)	Price† (\$)
MAX9788ETI+	Mono Class G speaker driver	28-TQFN (4 x 4 x 0.8)	0.65
MAX9788EBP+T	Mono Class G speaker driver	20-UCSP™ (2 x 2.5 x 0.6)	0.65

UCSP is a trademark of Maxim Integrated Products, Inc.

†100k-up recommended resale. Prices provided are for design guidance and are FOB USA. International prices will differ due to local duties, taxes, and exchange rates. Not all packages are offered in 1k increments, and some may require minimum order quantities.



www.maxim-ic.com/MAX9788-info

FREE Audio Design Guide—Sent Within 24 Hours!

CALL TOLL FREE 1-800-998-8800 (7:00 a.m.–5:00 p.m. PT)

For a Design Guide or Free Sample



Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

The Maxim logo is a registered trademark of Maxim Integrated Products, Inc. The Dallas Semiconductor logo is a registered trademark of Dallas Semiconductor Corp.

© 2007 Maxim Integrated Products, Inc. All rights reserved.