


SMALLEST HIGH-BRIGHTNESS LED DRIVER SIMPLIFIES LIGHTING DESIGN

**40V, 350mA LED Driver in TQFN Saves 83%
Board Space Over T0263 Package**

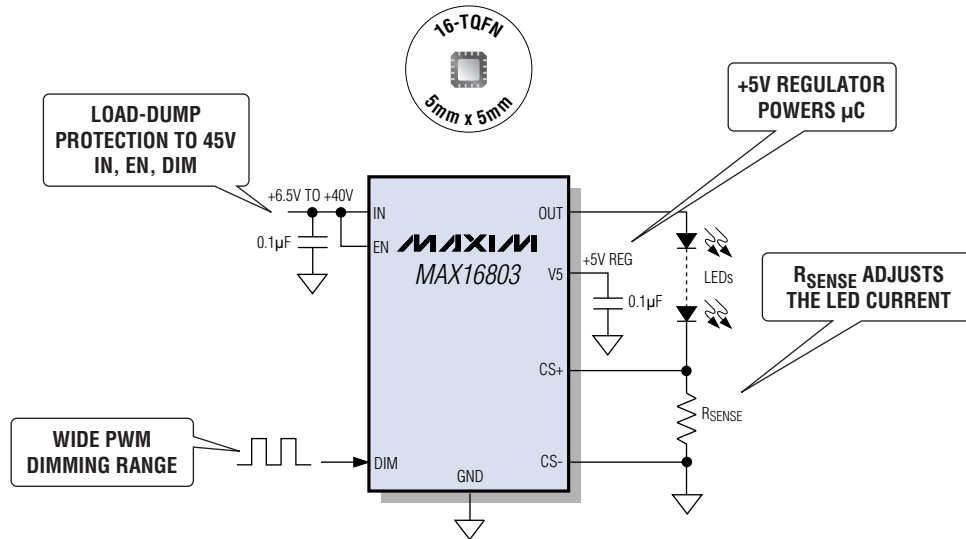

- ◆ Up to 2A LED Current with External BJT
- ◆ $\pm 3.5\%$ LED Current Accuracy
- ◆ Wave-Shaped Edge Control Minimizes EMI During PWM Dimming
- ◆ Low 200mV Current-Sense Reference Minimizes Power Dissipation
- ◆ Works Down to +5V for Automotive Cold Cranking
- ◆ Short-Circuit Protection
- ◆ Thermal Shutdown
- ◆ Operates from -40°C to $+125^{\circ}\text{C}$

IDEAL FOR

- AUTOMOTIVE INTERIOR AND EXTERIOR LED LIGHTING
- ACCENT AND ARCHITECTURAL LED LIGHTING
- SIGNAGE AND LED CHANNEL LETTERING

For Additional High-Brightness LED Drivers, Go to:
www.maxim-ic.com/HB_LED

MAXIM

www.maxim-ic.com/HB_LED

FREE Power Supplies Design Guide—Sent Within 24 Hours!

CALL TOLL FREE 1-800-998-8800 (7:00 a.m.–5:00 p.m. PT)

For a Design Guide or Free Sample

EVALUATION KIT
AVAILABLE

MAXIM/DALLAS
DIRECT!
DISTRIBUTION
1-888-MAXIM-IC

ARROW
ARROW ELECTRONICS, INC.
1-800-777-2776

AVNET
electronics marketing
1-800-332-8638

Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

The Maxim logo is a registered trademark of Maxim Integrated Products, Inc. The Dallas Semiconductor logo is a registered trademark of Dallas Semiconductor Corp.

© 2006 Maxim Integrated Products, Inc. All rights reserved.