


INDUSTRY'S ONLY FULLY PROGRAMMABLE, MULTISTATE, ANALOG AND DIGITAL VGAs

High-Linearity Monolithic Solutions Cover 50MHz to 1000MHz

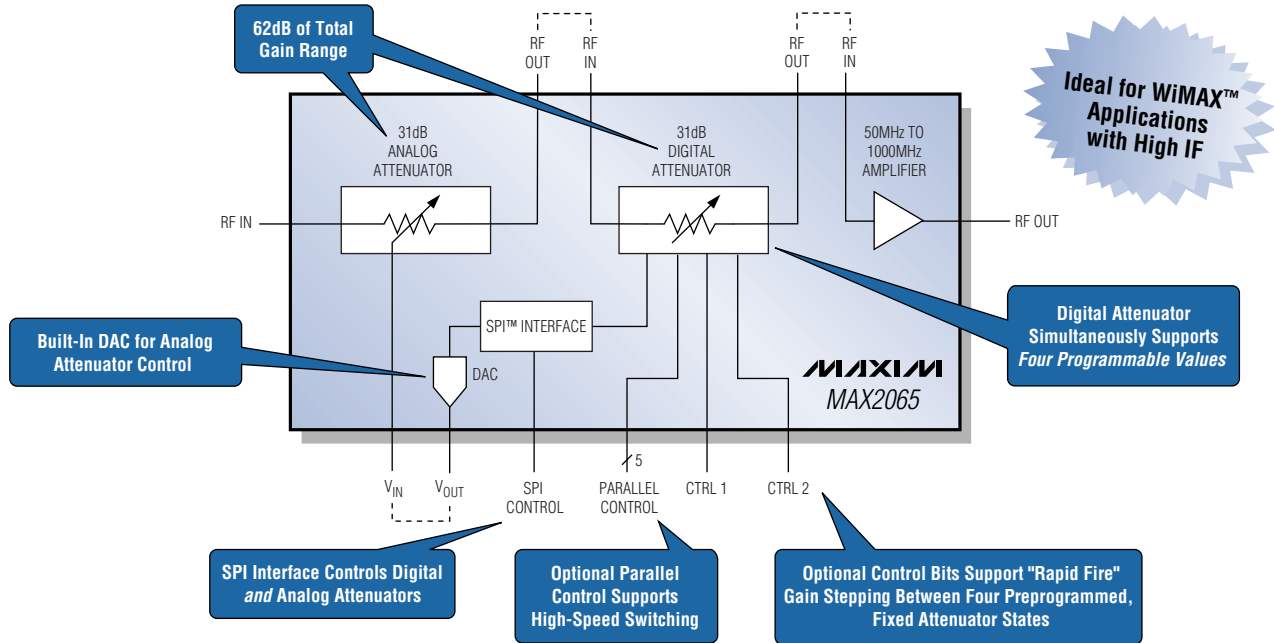

- ◆ Excellent Linearity
 - ◆ Up to +42dBm OIP3, +61dBm OIP2, +18.5dBm OP_{1dB}
 - ◆ -63dBc HD2 and -80dBc HD3 Performance
- ◆ Noise Figures as Low as 4.2dB
- ◆ Fast, 40ns Digital Switching
- ◆ Very Low Digital VGA Amplitude Overshoot/Undershoot
- ◆ 5V or 3.3V Supply
- ◆ Supports Four "Rapid Fire" Preprogrammed Attenuator States
 - ◆ Quickly Access Any One of Four Customized Attenuation States Without Reprogramming the SPI Bus
 - ◆ Ideal for Fast-Attack, High-Level Blocker Protection
 - ◆ Prevents ADC Overdrive Condition

Part	VGA Type	Frequency (MHz)	Gain Range (dB)	Digital Gain Steps (dB)	OIP3 (dBm)	OIP2 (dBm)	OP _{1dB} (dBcm)	HD2 (dBc)	HD3 (dBc)	NF (dB)
MAX2065	Analog/digital	50 to 1000	-43 to +19	1	41.5	60	18.5	-63	-80	6.6
MAX2066*	Digital	50 to 1000	-11 to +20	1	42	60.5	18.5	-63	-80	5.5
MAX2067*	Analog	50 to 1000	-9.5 to +21.5	—	42	61	18.5	-63	-80	4.2

SPI is a trademark of Motorola, Inc.
 WiMAX is a trademark of the WiMAX Forum.
 *Future product—contact factory for availability.



www.maxim-ic.com/program-vga

FREE Wireless Infrastructure Design Guide—Sent Within 24 Hours!

CALL TOLL FREE 1-800-998-8800 (7:00 a.m.—5:00 p.m. PT) for a Design Guide or Free Sample

