


ADD USB HOST FUNCTIONALITY WITH A SINGLE IC

Make Your μ P, μ C, DSP, or ASIC a Full-Speed USB Host/Peripheral

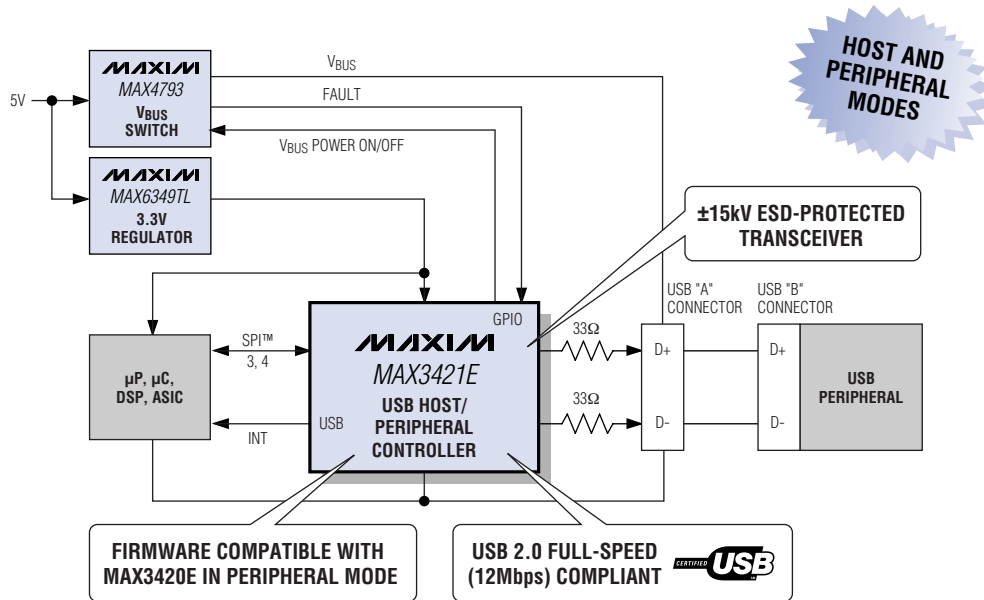

MAX3421E Features

- ◆ ± 15 kV ESD-Protected, Integrated Full-Speed USB Transceiver (12Mbps)
- ◆ SPI Interface to the Register Set (Up to 26MHz)
- ◆ Extra I/Os: 8 General-Purpose Inputs and 8 General-Purpose Outputs
- ◆ 5mm x 5mm, 32-Pin TQFN Package

Host Mode Features

- ◆ Automatically Generates Start Frames
- ◆ 256 bytes of FIFO for USB Data Transfers
- ◆ Supports Control, Bulk, Interrupt and Isochronous Transfers
- ◆ Ideal for USB Mice, Keyboards, Memory Sticks, Hub Support

Peripheral Mode Features

- ◆ Supports Four Endpoints
- ◆ 392 bytes of FIFO for USB Data Transfers
- ◆ Supports Control, Bulk, and Interrupt Transfers
- ◆ Ideal for Industrial, Meter Reading, Automotive, and Medical Applications

SPI is a trademark of Motorola, Inc.



www.maxim-ic.com

FREE Interface Design Guide—Sent Within 24 Hours!

CALL TOLL FREE 1-800-998-8800 (7:00 a.m.–5:00 p.m. PT)

For a Design Guide or Free Sample



Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

The Maxim logo is a registered trademark of Maxim Integrated Products, Inc. The Dallas Semiconductor logo is a registered trademark of Dallas Semiconductor Corp.
© 2006 Maxim Integrated Products, Inc. All rights reserved.