
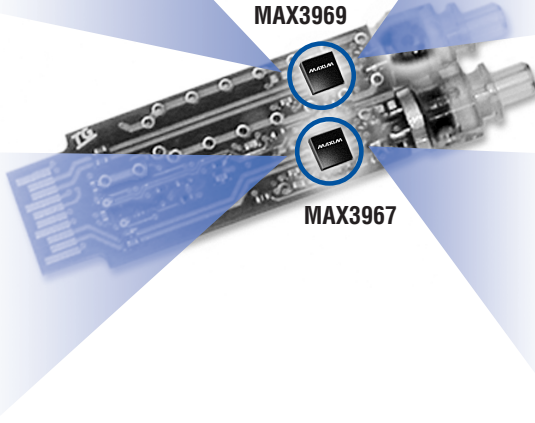
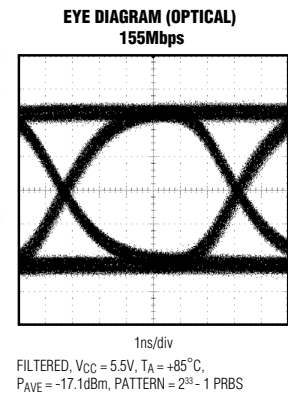
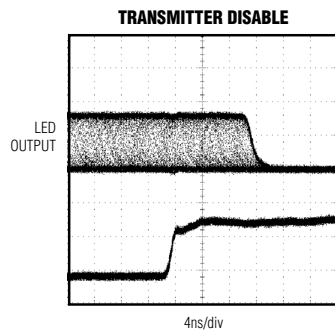
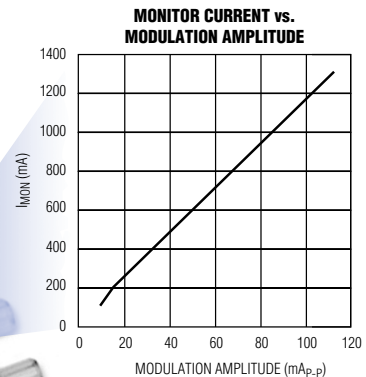


THE FIRST 200Mbps CHIPSET FOR SFP OPTICAL MODULES

Provides All Diagnostic and Interface Requirements for SFP MSA

The new chipset features include TX disable, modulation current monitor, receive signal-strength indicator, and choice of TTL, LOS, or PECL signal-detect outputs. The MAX3967 and MAX3969 are ideal for Fast Ethernet, ATM, and ESCON applications.

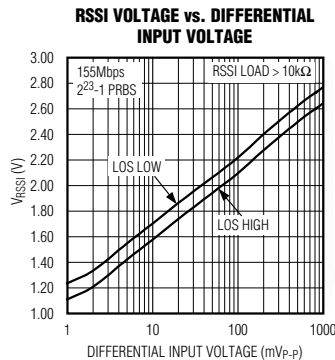

- ◆ 2.97V to 5.5V Power Supply
- ◆ -40°C to +85°C Operation
- ◆ Thin, 4mm x 4mm QFN package
- ◆ Meet SFP, SFF, 1 x 9 MSA Requirements
- ◆ Designed for Low EMI

Part	Function	I _{CC} (mA, typ)	Pin-Package	Price† (\$)
MAX3967	LED driver	30	24-QFN or dice	1.70
MAX3969	Limiting amp	22	20-QFN or dice	1.70

†1000-up recommended resale. Prices provided are for design guidance and are FOB USA. International prices will differ due to local duties, taxes, and exchange rates. Not all packages are offered in 1k increments, and some may require minimum order quantities.



www.maxim-ic.com

FREE Fiber Design Guide—Sent Within 24 Hours!

CALL TOLL-FREE 1-800-998-8800 (6:00 a.m.–6:00 p.m. PT)

For a Design Guide or Free Sample



Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

MAXIM is a registered trademark of Maxim Integrated Products, Inc. DALLAS is a registered trademark of Dallas Semiconductor Corp. © 2004 Maxim Integrated Products.