


27-BIT LVDS SERIALIZER/ DESERIALIZER LINK SYSTEMS WITH A SINGLE TWISTED-PAIR WIRE

Ideal for LCDs Up to 480 x 800 Resolution

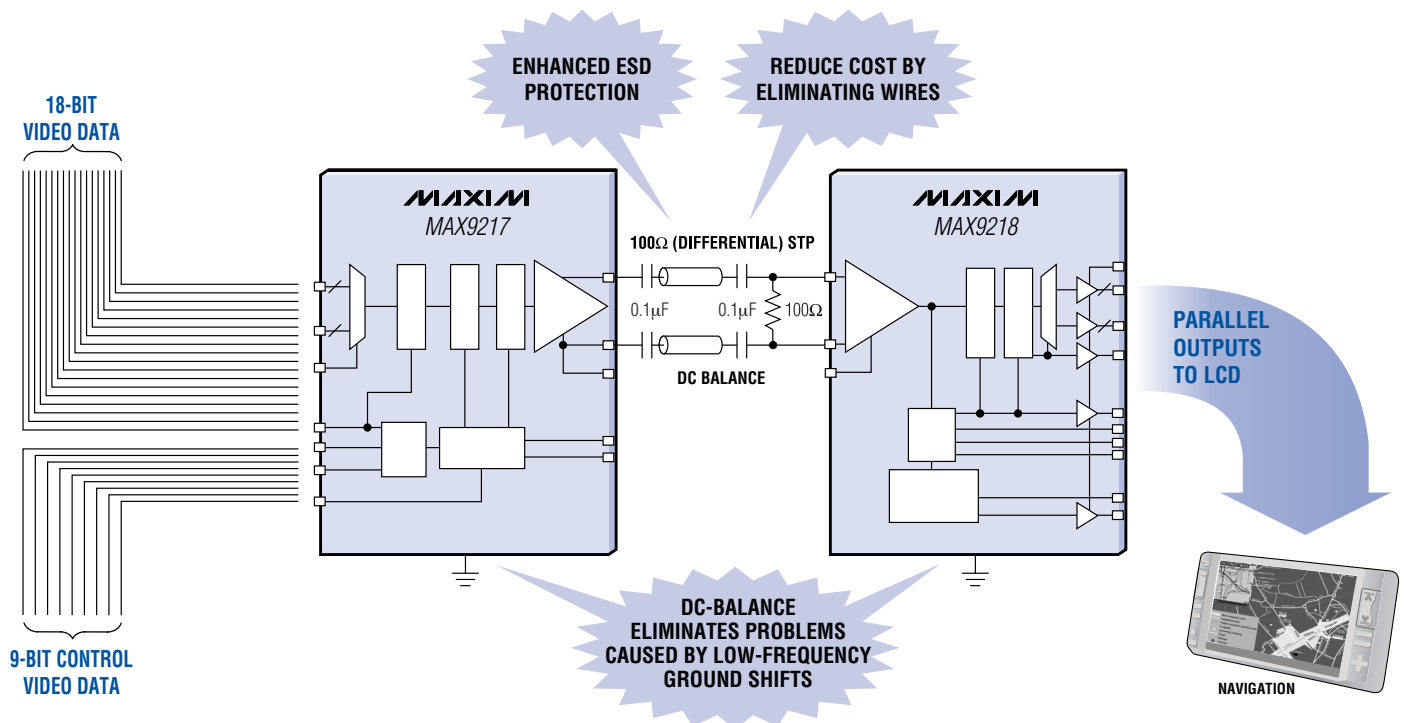

- ◆ 10m, STP Cable-Drive Capability
- ◆ Deserializer Output-Transition Time Scaled to Operating Frequency Range for Reduced EMI
- ◆ LVDS I/Os Meet ISO 10605 ($\pm 30\text{kV}$ Air, $\pm 10\text{kV}$ Contact) ESD Standard

- ◆ Deserializer Clock-Pulse Stretch on Lock
- ◆ Data Coding Reduces EMI
- ◆ Serial-Output, Common-Mode Filter Reduces EMI
- ◆ Integrated 100Ω Serializer Differential-Output Impedance Reduces Reflections

MAXIM

www.maxim-ic.com

FREE High-Speed Interconnect Design Guide—Sent Within 24 Hours!

CALL TOLL FREE 1-800-998-8800 (6:00 a.m.–6:00 p.m. PT)

For a Design Guide or Free Sample

**MAXIM/DALLAS
DIRECT!**
DISTRIBUTION
1-888-MAXIM-IC

ARROW
ARROW ELECTRONICS, INC.
1-800-777-2776

AVNET
CILICON
1-800-332-8638

Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

The Maxim logo is a registered trademark of Maxim Integrated Products, Inc. The Dallas Semiconductor logo is a registered trademark of Dallas Semiconductor Corp.
© 2005 Maxim Integrated Products, Inc. All rights reserved.